

# DYMOND® BATTERY LED FLOODLIGHT



## 10W CHARGEABLE BATTERY LED FLOODLIGHT

**10W** | **700**  
2500 MAH | LUMEN

**3700K**




**TURN & TILT**



**HOME USE +  
OUTDOOR WORK**



**LOW  
HEAT  
CONTROL**

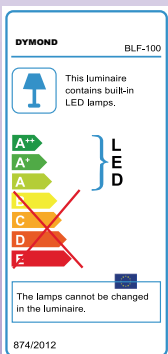

### KEY FEATURES

- Portable 10W work light: provides light wherever it is needed
- Suitable for indoor and outdoor use (IP65)
- Versatile light solution for multiple applications: For jobs in and around the house, office, warehouse, etc... & as an "emergency" light (f.e: during camping trips, power failure, while moving, ...)
- 120° angle beam for bigger workspace
- Lamp can turn & tilt: adjusts to a variety of angles
- Chargeable by 230V USB wall socket and USB cable
- Sturdy metal stand, aluminium/plastic housing and padded handle
- Compact size, easy to carry
- Stays cold to the touch, safe for kids
- High quality



### TECHNICAL SPECIFICATIONS

• Battery type	Zollner 2500 mAh
• Operation time	Max. 4 hours
• LED QTY	1pc EPISTAR BP SURFACE COB LED
• LED power	10W max
• Input power	USB 5V 1A max.
• Luminous efficiency	70 Lm/W
• LED Initial flux / Lumen	max. 700 Lumen
• Beam Angle	120°
• Swivel	yes, up & down
• Rotate	yes, 360°
• Color temperature	3700K (natural white)
• LED distribution mode	LED+two optical reflectors
• LED node temperature	≤60°C
• Work temperature	-20°C~+45°C
• Work humidity	10% ~ 90%
• Store temperature	-25°C~+65°C
• IP grade	IP65 waterproof
• LED life	>20000 hours
• Housing	Aluminium/Plastic
• Color	Black/Yellow
• Size	135 x 127 x 265 mm
• Weight	850g



### ADDITIONAL INFORMATION

EAN: 5414633065520

Certifications:



TE-GROUP N.V.  
Kapelsestraat 61, 2950 Kapellen, Belgium

Copyright © Dymond. Dymond is a registered trademark of TE-Group N.V. All rights reserved. Other brands and product names are trademarks or tradenames of their respective owners. Specifications are subject to change without prior notice.